


EXPANSION CARDS

6 Way Sounder Extender Board

Features

- ▶ 6 individually fused and monitored sounder outputs
- ▶ Fault and operated indications
- ▶ 2 opto-isolated general purpose inputs
- ▶ 2 volt free contact general purpose outputs
- ▶ Remote connection to panel via RS485 serial bus
- ▶ Common footprint to other Syncro I/O board types
- ▶ All outputs and inputs programmable for cause and effects
- ▶ Can be used with other Syncro I/O modules on the same panel
- ▶ Compatible with Syncro AS & Taktis panels

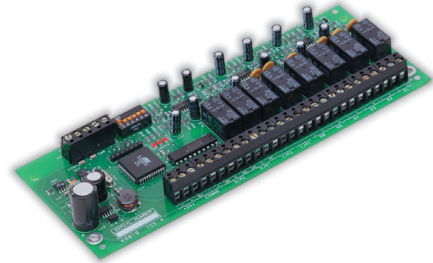

Description

To further enhance the versatility of the Syncro and Taktis fire alarm system, additional sounder output capability can be added using Sounder Boards.

These boards have 6 monitored sounder outputs, each of which can be individually programmed.

In addition to the sounder outputs each board has two general purpose, opto-isolated inputs and two volt-free changeover contact outputs.

Up to 32 of these boards can be connected to the dedicated RS485 communications bus in the control panel giving the capability of 192 additional sounder outputs with 64 general purpose inputs and 64 general purpose outputs.


The sounder boards may be mixed on the RS485 bus with 16 channel I/O boards, 8 way relay boards or 4 way conventional detection zone boards to provide a very flexible system of I/O to satisfy any requirement.

All inputs and outputs are configurable in the same way as devices connected to the loops and all may contribute to, or be acted upon by cause and effect logic.

These boards are typically used in applications that require more than the four standard sounder outputs such as replacement of existing conventional systems.

Standard Syncro control panels contain fixings for one sounder, relay, conventional detection or I/O board, which can easily be connected using four small signal wires to the power and comms bus within the panel.

Consideration must be taken as to the loading on the main panel.

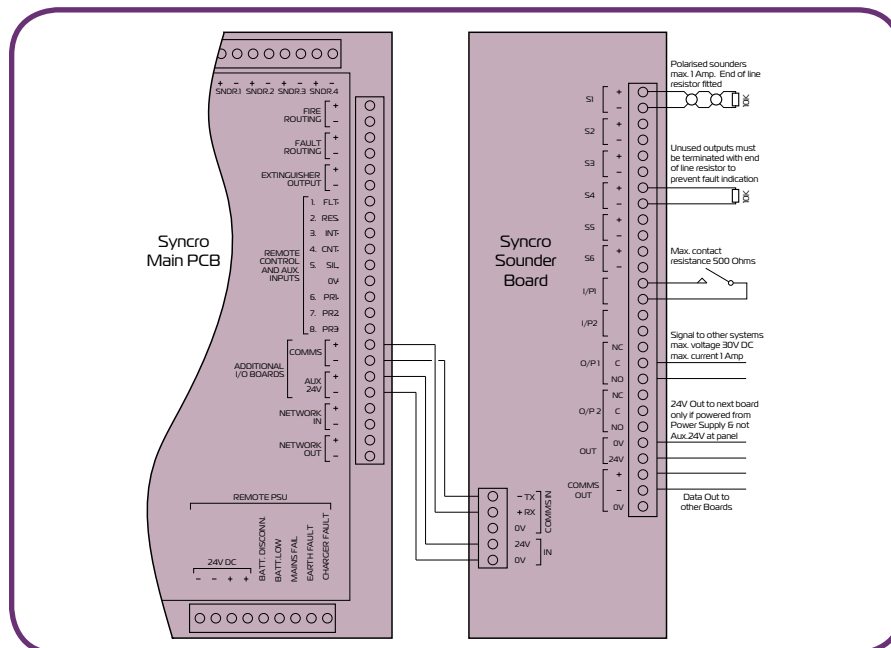

Specification

Product Code	K546
Supply Voltage	21-30V DC
Quiescent current consumption	30mA
Weight	1kg
Full alarm current consumption	260mA
Sounder current monitoring resistor	10K
Current per input	3mA maximum
Current per sounder output	1 Amp maximum
Output contact rating	30V DC 1 Amp
Communications	RS485 two wire
Max. distance from panel	1.2Km (using RS485 data cable)
PCB size	190mm x 74mm
Fixing centres	51.5mm x 180mm
Cable Capacity	2.5mm per terminal
Operating temperature	-5°C to +50°C
Operating humidity	To 95% (non condensing)