


## 8 CHANNEL CONVENTIONAL ZONE PANEL MODULE

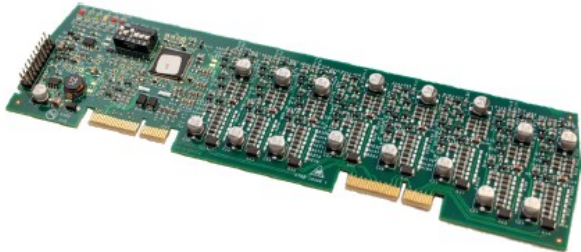

### STANDARD FEATURES

- Simple 'plug-in' connection to the L@titude Fire Alarm Control Panel
- 8 monitored, conventional, detection zone inputs
- Decals provided to redesignate terminals

### DESCRIPTION

The 8 Channel Conventional Zone Panel Module has 8 supervised detection circuits (Class B). Each circuit can support up to 20 conventional detectors and approved devices. Individual circuits may be configured for trigger resistor or short circuit activation. These circuits may be used for any of the standard input actions and can be configured to contribute to cause and effect logic. Each pair of circuits (e.g., 1 and 2, 3 and 4, etc.) can be joined to form a single Class A configuration.

### TECHNICAL SPECIFICATIONS

<b>Supply Voltage Range</b>	24 V DC
<b>Quiescent Current Consumption</b>	70mA
<b>Maximum Current Consumption</b>	950mA
<b>Maximum Line Impedance</b>	10.1 Ohms
<b>Dimensions</b>	9.25" x 2.5" (234.6mm x 62.8mm)
<b>Operating Temperature</b>	23° F to 120° F ( -5° C to 49° C)
<b>Operating Humidity</b>	to 95% (non condensing)

### PRODUCT LISTINGS



Manufactured by Kentec Electronics Ltd.  
Dartford, DA11 2Q, United Kingdom

*Specifications subject to change without notice.*

Hochiki America Corporation  
7051 Village Drive, Suite 100, Buena Park, CA 90621-2268  
Phone: 714-522-2246 Fax: 714-522-2268  
Technical Support: 800-845-6692 or [technicalsupport@hochiki.com](mailto:technicalsupport@hochiki.com)



Find latest revision at [www.hochiki.com](http://www.hochiki.com)

F0234 05/2019