



TEE PIECE

(ABS006 - 25mm)


This device is used when a "Bull nose" or "Side tee" flow split is required.

This device aspirating fire detection only


Installation Instructions:

Do not paint. Keep pipe clean and free from dust.
Do not install in direct sunlight. Only install with approved pipe and fittings. Do not use solvents to clean, only soapy water.

Operating Temperature: -40°C to 70°C
Pipe Colour: RED
Diameter Tolerance: +/- 0.15mm
Wall Thickness: 2.91mm
Outside Diameter: 30.8mm
Inside Diameter: 25mm
Weight: 22 Grams

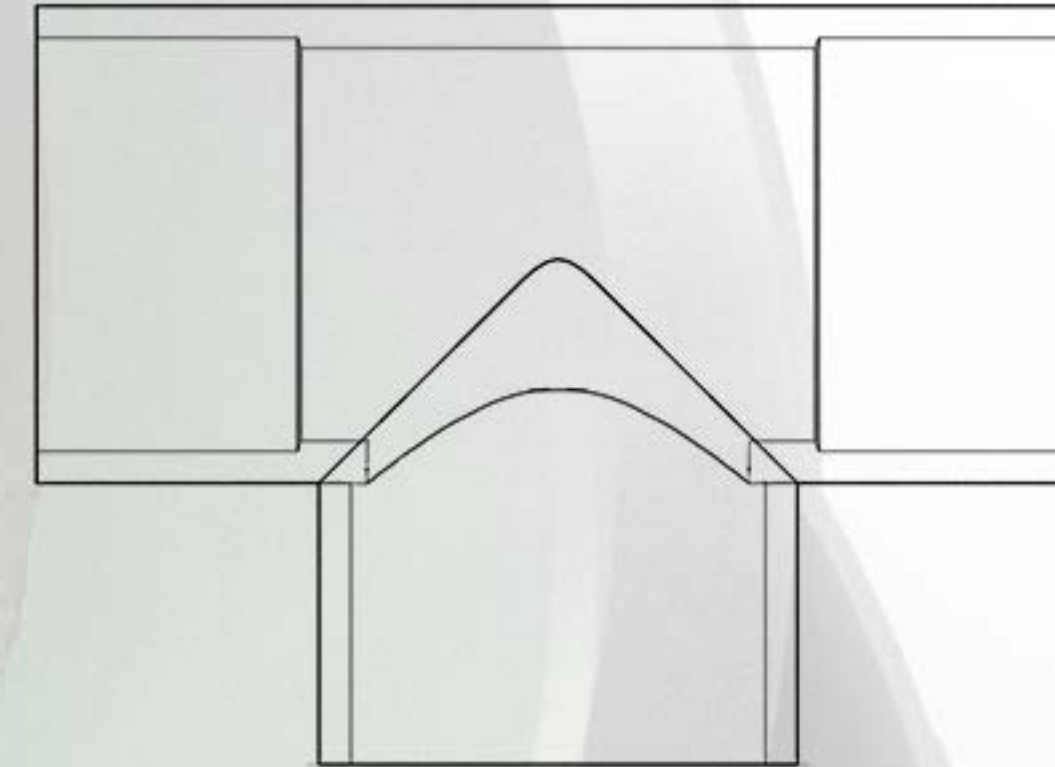

Side Elevation

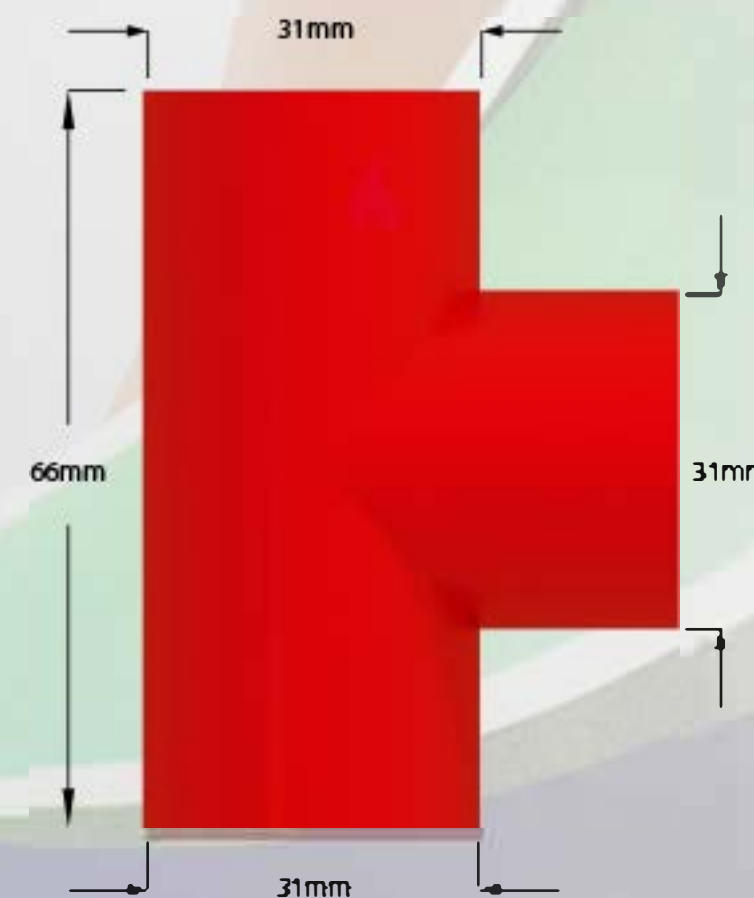

Front Elevation



0.006 in (0.15 mm) HB
0.006 in (0.15 mm) HB
0.126 in (3.20 mm) HB
Test Method UL 94

Bisson Ltd
Unit 11, Eptonwell Trading Estate,
St Philips, Bristol, BS43 0EE
Tel: 0117 967 9999
Fax: 0117 961 9261
<http://www.bissonpipeandfitting.co.uk>