



FLEXIBLE BEND 1m

(ABS031 - 25mm)


Soft PVC hose with embedded steel wire reinforcement. Very flexible, strong, abrasion resistant, smooth inside and outside.

Installation Instructions:

Do not paint. Keep pipe clean and free from dust. Do not install in direct sunlight. Only install with approved pipe. Do not use solvents to clean, only soapy water.

Operating Temperature:	-40°C to 70°C
Diameter Tolerance:	+/- 0.15mm
Wall Thickness:	3mm
Outside Diameter:	31mm
Inside Diameter:	25mm
Weight:	366.20 Grams

Jointing Socket Side Elevation

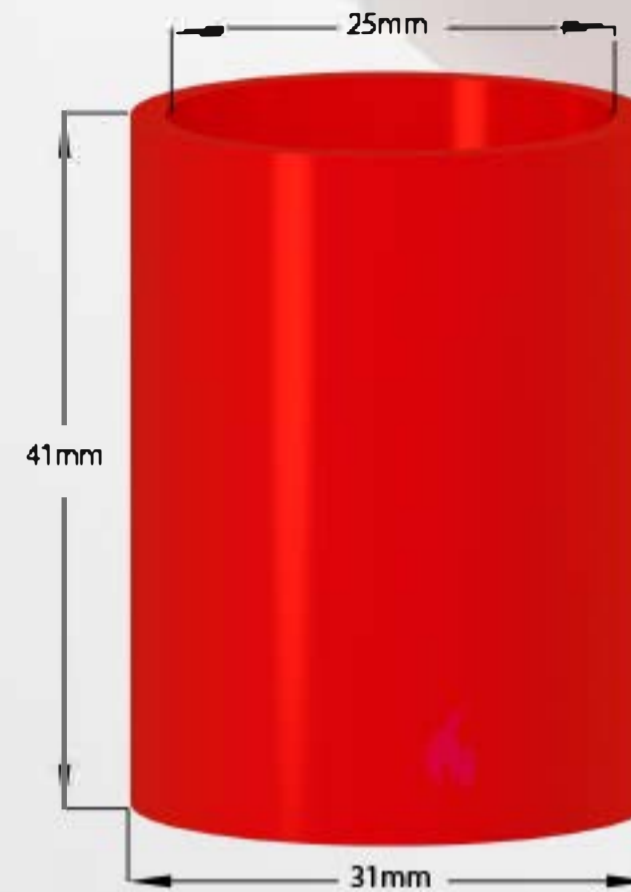

Jointing Socket Front Elevation

