

CDX

CONVENTIONAL BELLS



The MBF-6EV and FB/024/R/W are both six-inch, aluminium alarm bells based upon the industry standard KOBELL range.

Model MBF-6EV is for internal use

- **Low current consumption**
- Fully suppressed and polarised
- > 95dB(A) at 1 metre (typ)





Model FB/024/R/W comes equipped with a weatherproof back box enabling it to be used externally.

- Low Profile
- **Low current consumption**
- Fully suppressed and polarised
- ▶ 100dB(A) at 1 metre (typ)
- ▶ Weatherproof for external installation
- Simple installation with multi-fixing base plate





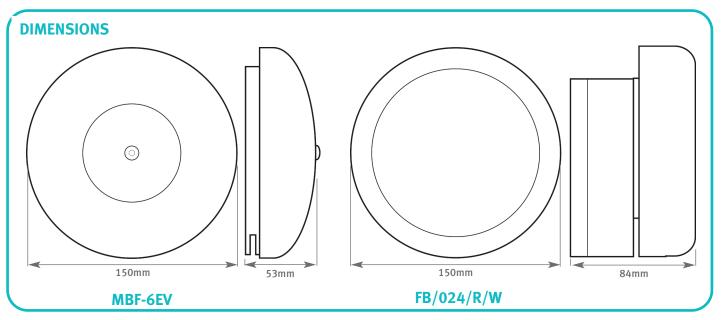

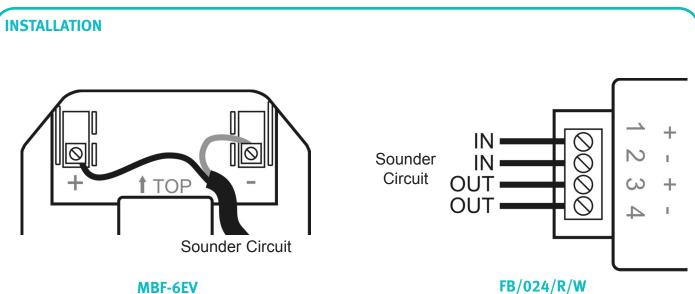

SPECIFICATIONS

Ordering Code	MBF-6EV
Operating Voltage	20.4 – 27.6 V dc
Rated Current (±20%)	11 mA
Operating Temperature Range	-10 °C to +50 °C
Maximum Humidity	45-85% RH - Non
	Condensing (at 40 °C)
Gong Colour	Red
Gong Material	Aluminium
Maximum Sound Output	96.5 dB(A) at 1 metre
Ingress Protection Rating	IP23C
Weight (g)	410

Ordering Code	FB/024/R/W
Operating Voltage	20.4 - 27.6 V dc
Rated Current (±20%)	12 mA
Operating Temperature Range	-10 °C to +50 °C
Maximum Humidity	45-85% RH - Non
	Condensing (at 40 °C)
Gong Colour	Red
Gong Material	Aluminium
Maximum Sound Output	100.5 dB(A) at 1 metre
Ingress Protection Rating	IP33C
Weight (g)	780 (inc back box)

HOCHIKI EUROPE (UK) LIMITED


Grosvenor Road, Gillingham Business Park, Gillingham, Kent, England ME8 0SA Telephone: +44 (0)1634 260133 Facsimile: +44 (0)1634 260132

e-mail (UK): sales@hochikieurope.com e-mail (Non UK): export@hochikieurope.com

www.hochikieurope.com



Quality System Certificate No. 164 Assessed to ISO9001



Hochiki Europe (UK) Ltd. reserves the right to alter the specification of its products from time to time without notice. Although every effort has been made to ensure the accuracy of the information contained in this document it is not warranted or represented by Hochiki Europe (UK) Ltd. to be a complete and up-to-date description.

PART No. 9-5-0-275/ISS6/MAY12