




HCP-E(SCI)/SIL

Analogue Addressable Manual Call Point with Short-Circuit Isolator

Features

- ▶ SIL Level 2 approved
- ▶ Ideal for use in oil and gas environments
- ▶ Fast response
- ▶ Integral short-circuit isolator
- ▶ Bi-coloured status LED
- ▶ Non-frangible element fitted as standard (conforms to EN54)
- ▶ Addressed with TCH-B200 Hand Held Programmer
- ▶ Surface or flush mounting (if surface mounting, requires SR MOUNTING BOX – sold separately)
- ▶ LPCB Approved to EN54-11

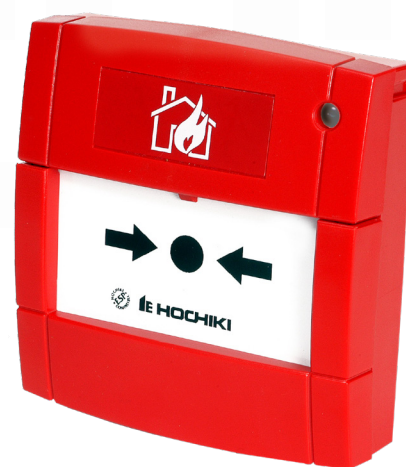

Description

Model HCP-E(SCI)/SIL is a Manual Call Point with integral short-circuit isolator, which has been independently assessed and approved for use in a SIL2, low demand safety function with regards to random failure rates. The unit incorporates a bi-coloured LED, which can be selected as pulsing/non-pulsing*1 for communications polling and is continuously lit when the HCP-E(SCI)/SIL is operated – in these two states the LED will show red. The LED will show amber when a short-circuit is present but will switch to red if the unit is activated. A built in test function initiated by the control panel ensures the integrity of the device at all times and the device can be tested by insertion of a test key in the underside of the unit. Two terminal blocks are provided for easy connection to the loop wiring.

The unit is addressed using the TCH-B200 Hand Held Programmer for quick and reliable addressing. The unit can be flush mounted as supplied. For surface fixing a suitable back box such as the SR MOUNTING BOX is required (sold separately). An optional glass element is also available.

Specification	
Operating Voltage	17 – 41 VDC
Low Power Mode (typ)	180 µA (max), 100 µA (typ)
Quiescent Current	350 µA (max), 250 µA (typ)
Alarm Current	10.0 mA (max), 5 mA (typ)
Resistance in positive	100 mΩ when closed (max), 100 kΩ when open (min)
Short-circuit threshold (typ)	430 Ω
Transmission Method	Digital Communication Using ESP
Operating Temperature Range	-10 °C to + 50 °C
Storage Temperature Range	-30 °C to + 70 °C
Maximum Humidity	95% RH - Non Condensing (at 40 °C)
Ingress Protection Rating	IP24
Colour / Case Material	Red / Modified Polyphenylene Oxide
Weight (g) / Dimensions (mm)	(Flush Unit) 110 / W 89 x H 93 x D 27.5
	(With Surface Mount Back Box) 161 / W 89 x H 93 x D 59.5

*1 Fire alarm control panel compatibility is required for this feature.

Ordering Codes

Product	Part Number
Analogue Addressable Manual Call Point with Short-Circuit Isolator	HCP-E(SCI)/SIL
Call point Back Box (required for surface fixing – sold separately)	SR MOUNTING BOX



For further information visit www.hochikieurope.com/silapproved

Hochiki Europe (UK) Ltd. reserves the right to alter the specification of its products from time to time without notice. Although every effort has been made to ensure the accuracy of the information contained in this document it is not warranted or represented by Hochiki Europe (UK) Ltd. to be a complete and up-to-date description.