



Thermostick Elettrotecnica Srl

Oil & Gas
Special application

Cable turnbuckle for floating roof tank



Cable turnbuckle for floating roof tank

Application:

- Reliable connection between linear heat detector on floating roof tank and FACP




Highlight Features:

- ATEX
- IECEX
- AISI 316 Stainless steel box
- AISI 316 Junction box
- 23 mt cable turnbuckle
- Easy installation and maintenance




Accessories:

- Linear Heat Detector UL/FM
- Thermoplastic fixing clip
- Messenger wire
- Turnbuckle, Redance, U brancket
- L Brancket
- Junction box
- Cable gland
- Ex Galvanic Barrier








How Cable Turnbuckle works

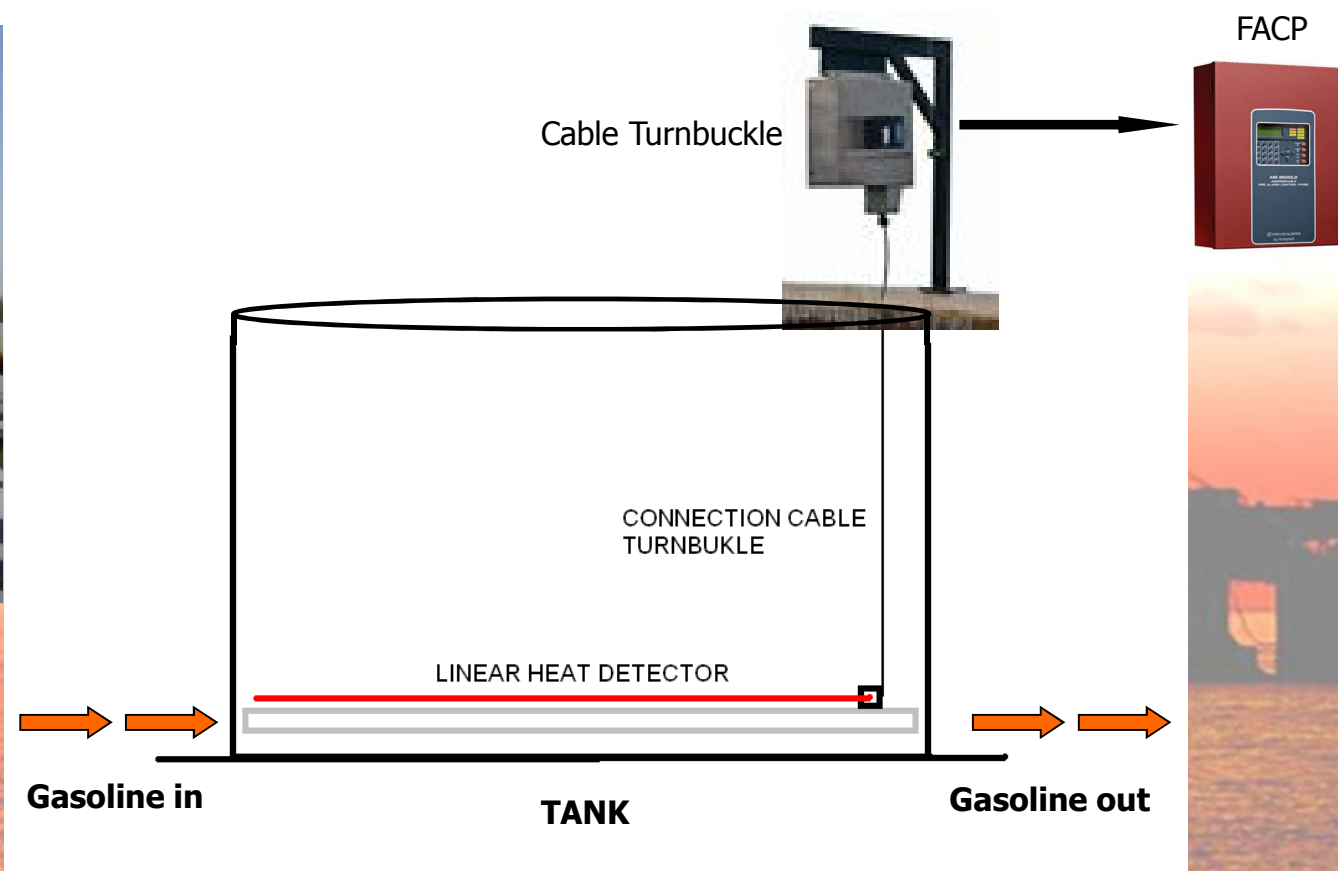



Some application of cable turnbuckle

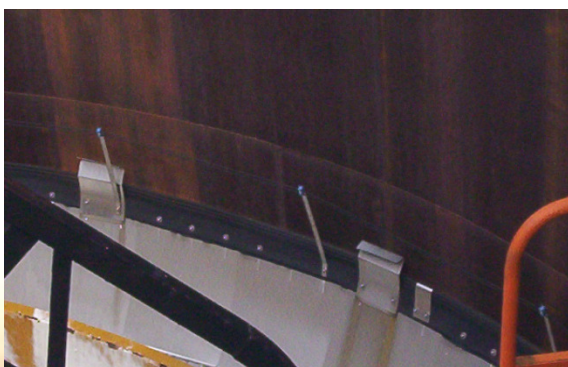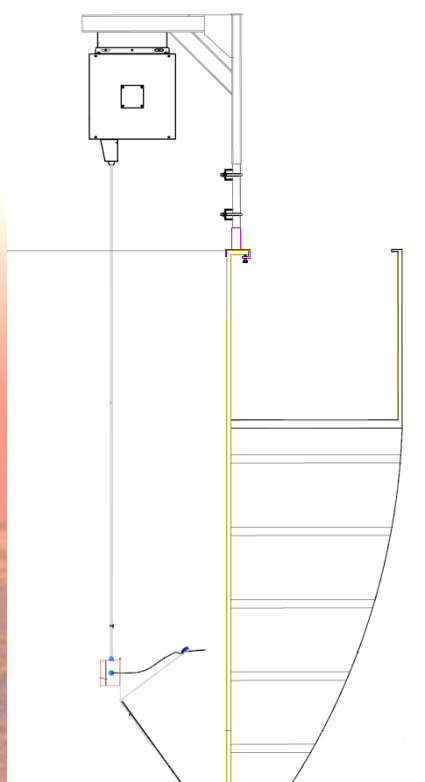

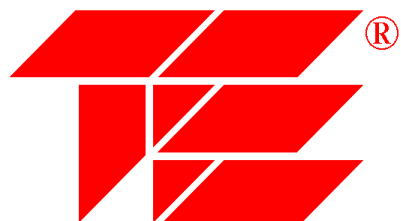

Thermostick Elettrotecnica Srl

Via Sentirone, 10
Paderno Dugnano (MI)
ITALY
Phone + 39 02.910.80.135
Fax +39 02.990.47.326

www.thermostick.it
info@thermostick.com