

Zenith

versione/version:01/2018

**BATTERIA SIGILLATA AGM
AGM MAINTENANCE FREE BATTERY**

ZGL120054



CHARACTERISTIC / CARATTERISTICHE

Volt	12V	
Capacity / Capacità	20h	45Ah
	5h	38.30Ah
Internal Resistance	Full Charged Battery 25°C ≤8mΩ	
Capacity affected by Temperature / Effetti delle temperature sulla capacità	40°C	102%
	25°C	100%
	0°C	85%
	-15°	65%
Self-Discharge 25°C Capacity / Autoscarica a 25°C	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge (Costant Voltage 25°C)	Float	Volt 13.6 - 13.8V
	Charge	Max.9.6Amp. 14.4 - 15 Volt

CHARACTERISTIC / CARATTERISTICHE

Battery dimensions / Dimensioni batteria			
L/L	W/P	H/A	Tot - H/A
198	166	171	171
Box Dimensions / Dimensioni scatola			
L/L	W/P	H/A	
-	-	-	
Weight / Peso		13.50Kg	
Terminal / Terminali		M6	
Case / Contenitore		ABS	

Amp. (25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V												
1.65V												
1.70V												
1.75V												
1.80V												

Watts (25°C)


F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V												
1.65V												
1.70V												
1.75V												
1.80V												

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact U.B.S. UNION BATTERY SERVICE for the latest information.


Le informazioni contenute in questa scheda tecnica sono solo descrittive e indicative, non sono una garanzia. U.B.S. UNION BATTERY SERVICE si riserva il diritto di aggiornarle/modificarle senza preavviso.




www.unionbatteryservice.it

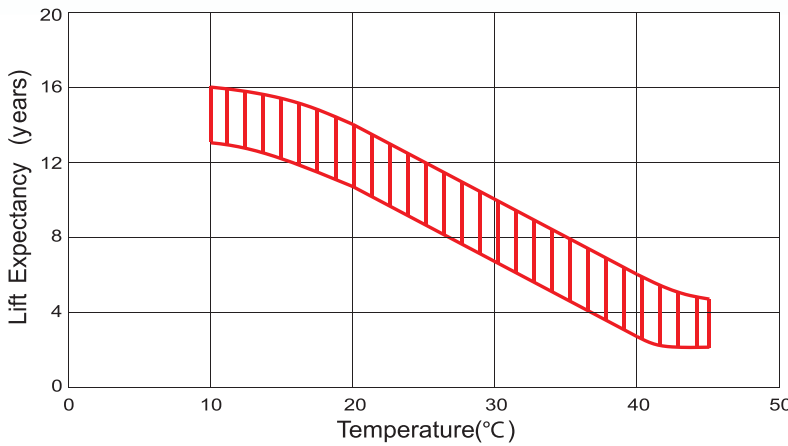


Charging characteristics

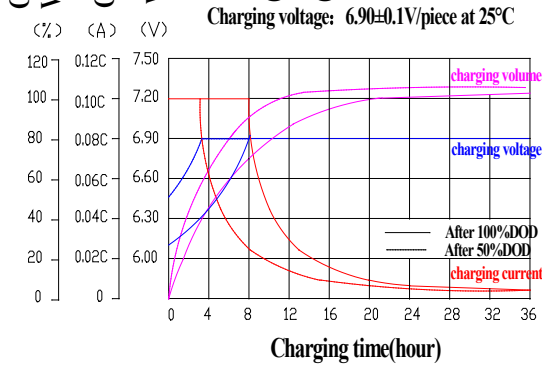

Temperature effect on battery self-discharge

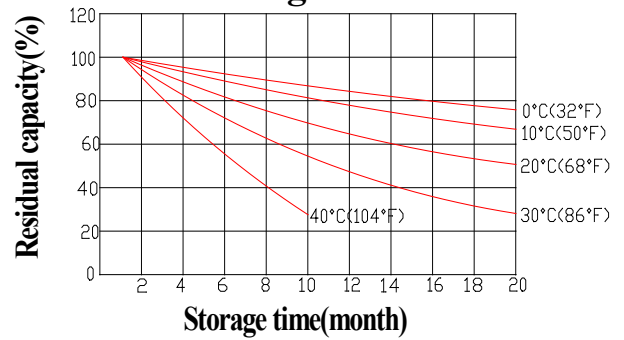

Discharge characteristics (25°C)

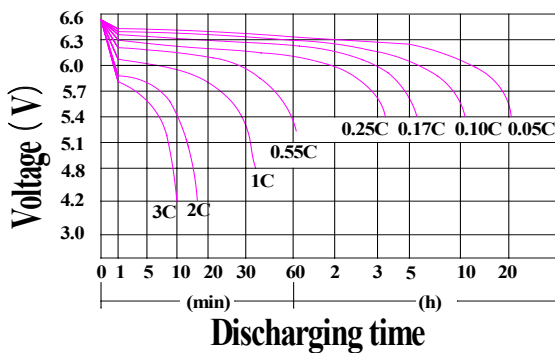

Temperature effect on capacity

